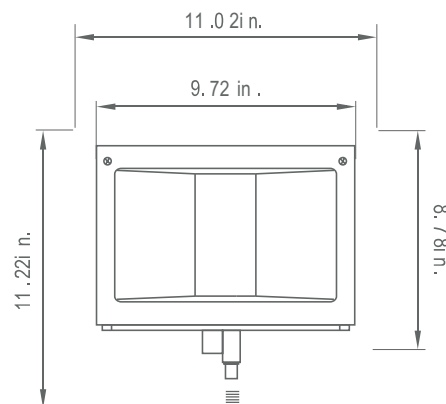



## **EXHIBIT 30**

DECO® | LIGHTING

**D211-LED****Medium Round Back Flood****Description**

The functional and aesthetically pleasing D211-LED is ideal for buildings, backyards, parks, signs, sports fields, and other general applications where flood lighting may come into use. Also suitable for accent, facade, landscape, parking lot, pathway, recreation, retail and security lighting.

**Ordering Information**

Example: (D211-LED-40-50-UNV-T5-HK-BL-WG)

**D211-LED**

Series	Wattage/Lumen		Color Temp.		Voltage		Optics		Mounting		Finish		Option			
Medium Round Back Flood	20	20W/2030 <sup>3</sup>	30	3000K	UNV	120-277V	T2	Type 2	SF	Slip Fitter	BZ	Bronze <sup>1</sup>	PC	Photocell		
	30	30W/3040 <sup>3</sup>	35	3500K	347	347V	T3	Type 3	HK	Heavy Duty Adjustable	BL	Black	WDF	Wired Double Fuse <sup>5</sup>		
	40*	40W/4050 <sup>3</sup>	40	4000K	480	480V	T4	Type 4		Knuckle	WH	White	WSF	Wired Single Fuse <sup>5</sup>		
	60	60W/6090 <sup>3</sup>	50	5000K <sup>4</sup>	(Step-Down Transformer used for 480V Divider)		T5	Type 5 <sup>1</sup>	PF	Post Top Fitter	CU	Custom <sup>2</sup>	TP	Tamper Proof		
	80	80W/8120 <sup>3</sup>					NSP	11° <sup>6,7</sup>	GST	Ground Stake Top Fitter			GS	Glare Shield		
							MSP	29° <sup>6,7</sup>	YM	Yoke Mount				PG	Polycarbonate Lens Shield	
							MFL	67° <sup>6,7</sup>							WG	Wire Guard

\*Select-A-Watt model, factory set at listed wattage when shipped. Please contact factory for information on selectable wattages for this fixture.

<sup>1</sup> Standard for fixture

<sup>2</sup> Contact factory for custom finish

<sup>3</sup> Delivered Lumens (5000K)

<sup>4</sup> Standard Color Temp.

<sup>5</sup> Please specify voltage (eg. 120V)

<sup>6</sup> Under Glass

<sup>7</sup> 60W & Below Only

**Medium Round Back Flood****Features**

- Rugged cast aluminium "round back" housing protects internal components.
- Die-cast aluminium door with twin screw enclosure and hinged bottom.
- Tempered, impact resistant glass lens with weather tight gasket seal.
- Large .5" universal aiming swivel knuckle with various mounting adapters
- Slip Fitter mounting bracket designed to fit 2 3/8" pole
- Wide, uniform beam for signs, facades and small areas.
- Bronze or white protective powder coated finish.
- UL 1598 listed for wet locations.
- Approx. Weight: 13 lbs

**Performance Data**

CRI:	80+
CCT:	3000K, 3500K, 4000K, 5000K
Warranty:	10 yr. Limited Warranty
Dimming:	Available with 0-10V inputs dimming down to 10%
Operating Temperature:	0°-65°C Max Ambient
L70 Rating:	100,000+ Hours
IP Rating:	IP65
Drive Current:	700mA
Sound Rating:	Class A (inaudible in a 24dB ambient environment)
Power Factor:	>0.95
Total Harmonic Distortion:	<15%
BUG Rating:	B3      U1      G1

**Delivered Light Output & Equivalency Chart**

<b>HID to LED Replacement</b>		
<b>DELIVERED LUMENS</b>	<b>HID</b>	<b>LED Replacement</b>
1300lm	50W	10W
2600lm	70W	20W
3900lm	100W	30W
5200lm	150W	40W
7800lm	175W	60W
11700lm	250W	80W
15600lm	400W	120W
26000lm	750W	200W
31200lm	1000W	240W

Interested in upgrading from HID to LED lighting? Use the conversion table below to get a general idea of what wattage LED fixture will replace your current lighting system. Lumen output and overall performance will vary by fixture, so please contact our factory or your nearest sales rep regarding specific questions on what wattage will best suit your desired space and application.

**Options & Accessories**

<b>Glare Shield</b>	<b>Polycarbonate Lens Shield</b>	<b>Wire Guard</b>	<b>Heavy Duty Adjustable Knuckle</b>
			
			
<b>HID Ground Stake</b>	<b>Yoke Mount</b>	<b>External Mount Slip Fitter</b>	<b>Post Top Fitter</b>